CHANGE ORDER NO. 4

Owner:	**City of Clinton**	Owner's Project No.:	**Client No.**
Engineer:	**Garver**	Engineer's Project No.:	**22W02360**
Contractor:	**Krapff Reynolds Construction Company**	Contractor's Project No.:	**S-2505**
Project:	**Clinton Water Improvements**		
Date Issued:	**November 14, 2025**	Effective Date of Change Order:	

Contractor is directed to proceed promptly with the following change(s):

Description:

Change 115 LF of waterline from 8" DIP Trenchless Installation to 8" DIP Open Cut on Waterline 3.

Attachments:

Cost Breakdown Letter

Revised Drawing Number 05-C304

Purpose for the Change Order:

Installation Method Change

Directive to proceed promptly with the Work described herein, prior to agreeing to change in the Contract Price and Contract Time, is issued due to:

☒ Non-agreement on pricing of proposed change. ☐ Necessity to proceed for schedule or other reasons.

Estimated cost to be added and deducted from the contract unit prices (non-binding, preliminary):

Net Cost: -$12,350.00

Days to start: 5 days

Basis of estimated change in Change Order Used:

☐ Lump Sum ☒ Unit Price ☐ Cost of the Work ☐ Other

	Recommended by Engineer	Authorized by Owner
By:	Thomas M. Klinck	
Title:	Project Manager	
Date:	November 14, 2025	

EJCDC® C-940, Work Change Directive.
Copyright© 2018 National Society of Professional Engineers, American Council of Engineering Companies, and American Society of Civil Engineers. All rights reserved.

Krapff Reynolds Construction Company

Fred L. Krapff
Utility Contractor
James "Jim" L. King

Mr. Thomas Helvick, PE.
Garver
750 SW 24th St. Suite 200
Moore, OK 73160

November 14, 2025

RE: Clinton Water Improvements

Mr. Helvick, We are writing this letter to provide accounting for the change from bore to open cut on Water Line 3 North of the cross tee.

The following items will need to be amended by change order to the quantities:

Item 5 – 20" Casing Installed via Trenchless Construction, deduct 115 LF @ $440.00/LF	($50,600.00)
Item 6 – 20" Casing Installed via Open Cut, add 115 LF @ $120.00/LF	$13,800.00
Item 18 – Combined Curb & Gutter, add 12 LF @ $125.00/LF	$1,500.00
Item 19 – Removal of Curb & Gutter, add 12 LF @ $10.00/LF	$120.00
Item 20 – Standard Bedding Material or Select Backfill, add 111 CY @ $60.00/CY	$6,660.00

The following items will need to be added by change order:


Item CO 3.1 – Removal of Concrete Pavement, add 77 SY @ $10.00/SY	$770.00
Item CO 3.2 – Concrete Pavement Placement, add 77 SY @ $200.00/SY	$15,400.00


Total Deductions by Amendment to Quantities	($50,600.00)
Total Additions by Amendment to Quantities	$22,080.00
Total Additions by Change Order to Quantities	$16,170.00
Net Deduction to Contract	($12,350.00)

JUSTIFICATION – Because the turn lane is already shut down as a result of prior work, we can save the City money and expedite the installation of the water line in this area by installing the required casing by open cut method in lieu of trenchless boring. Because the water line contract did not originally have quantities for concrete pavement removal and replacement, those quantities will need to be added by change order.

Respectfully,

Wade Vakulick,
Project Manager,
Krapff Reynolds Const. Co.

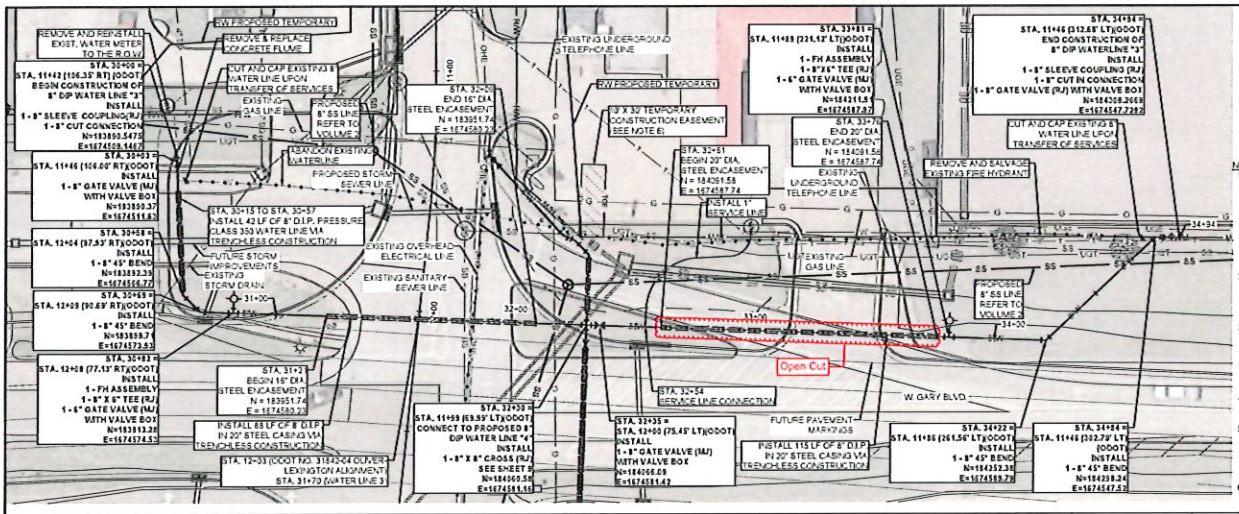

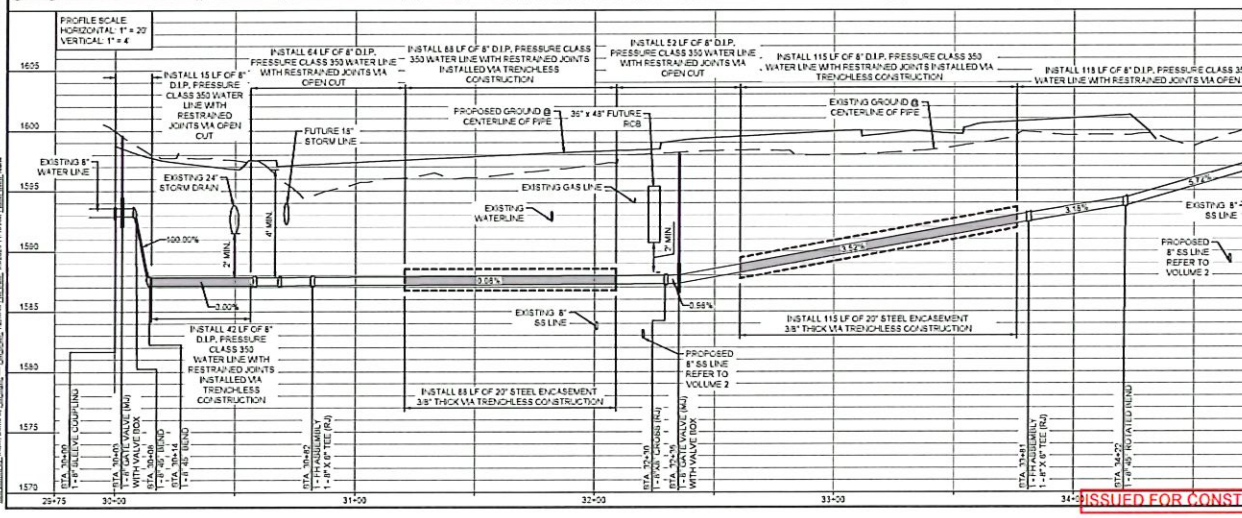

ISSUED FOR CONSTRUCTION

GARVER
EIK CA# 8483 EXPIRES 06/30/2026
752 E/A 24 ST, SUITE 2 Moore, OK 73160 (405) 593-8752
1/3/2025
Mahak A. Sahoo 33648
REV. | DATE | DESCRIPTION | BY
CITY OF CLINTON CLINTON, OK 73601
CLINTON WATER IMPROVEMENTS
WATER LINE 3 PLAN AND PROFILE STA. 30+00 TO STA. 34+54
JOB NO. 22VC0393
DATE JAN 2025
DESIGNED BY MAS
DRAWN BY AJD
CHECKED BY LOP
DRAWING NUMBER 05-C304
SHEET NUMBER 09